

Rapid Replacement Pod™


PD7960 2-Position, 10-Port

Description

The PD7960 is an analytical scale, DuraLife™ 2-position, 10-port Rapid Replacement Pod for a TitanHP™ valve.

Flow Diagram

A schematic of the Pod flow switching pattern is shown below. The numbered circles represent the ports in the Pod stator and stator face assembly. The grooves represent the connecting passages in the rotor seal. Please note that this is a representation of the flow path and may not show the true position of the ports and grooves.

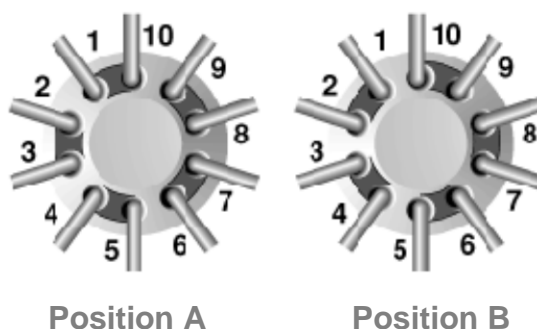

Specifications


- › **Liquid Contacts:** DuraLife
- › **Port Size:** Accepts 10-32 male threaded fittings
- › **Flow Passage Diameters:** 0.25-mm (0.010")
- › **Port to Port Volume:** 500nL
- › **Maximum Pressure:** 41 MPa (414 bar, 6000 psi).
- › **RoHS Compliant:** Yes

NOTE: Shipping, storing or operating this valve below 0°C with water in the fluid passages may cause failure of the sealing surfaces.

PD7960

Dimensional Drawing

Dimensions are in inches [millimeter]

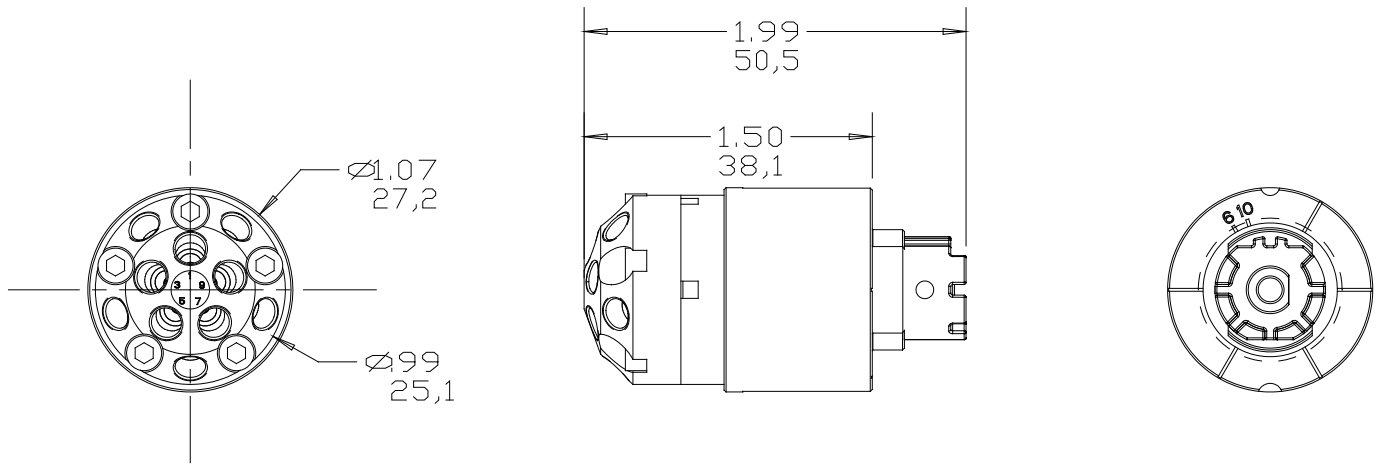

Page 2 of 2
PD7960 2321410F
07/15/2016